CUI INC

date 03/2009


PART NUMBER: GC0351N **DESCRIPTION:** speaker

SPECIFICATIONS

nominal size	16 x 35 mm			
impedance	8 Ohm ± 15%	at	1.5 kHz 1 V	
resonant frequency	650 Hz ± 130 Hz	at	1 V	
sound pressure level	82 dB/W ± 3 dB	1 W 50 cm ave. at 0.8 k, 1 k, 1.2 k, 1.5 k Hz		
response	Fo Hz ~ 20 kHz max 10 dB			
input power	nominal	1 W	handling capacity	2 W
operation	must be normal at program source 1 W			
buzz, rattle, etc.	must be normal at sine wave 2.83 V			
magnet	size: 7.9 x 1 mm			
load test	white noise	1 W	for	24 hours
distortion	5% max.	1,000 Hz	1W	
heat test	65 ± 2° C	20~50% R.H.	24 hours	
humidity test	40 ± 2° C	90~95% R.H.	24 hours	

FREQUENCY RESPONSE CURVE

potentiometer range	50 dB
rectifier	RMS
lower limit frequency	20 Hz
wr. speed	100 mm/sec

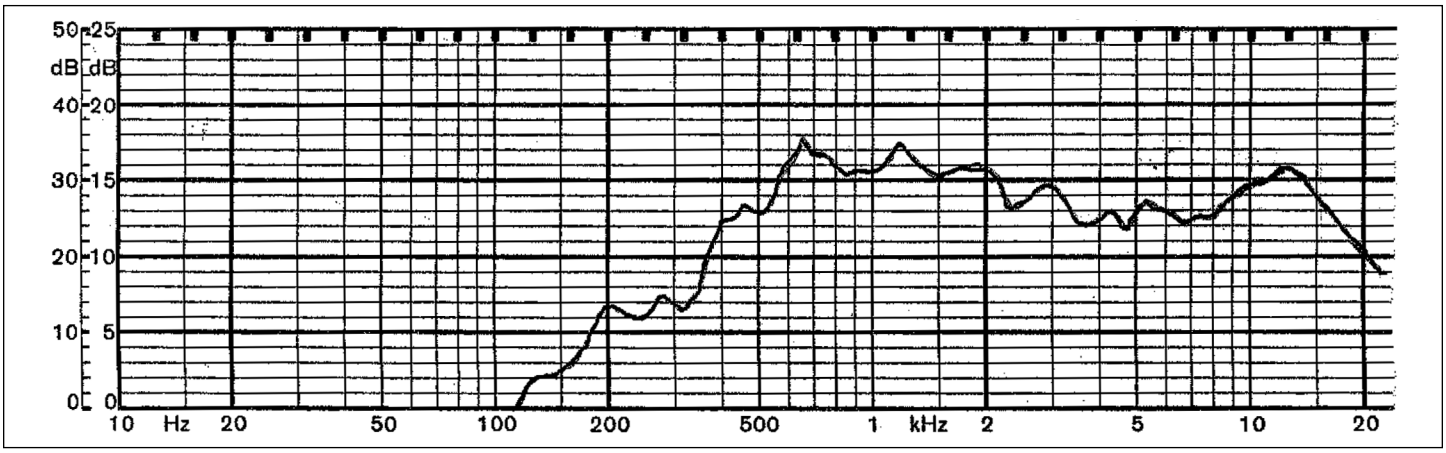

zero level 50 dB

CUI INC

PART NUMBER: GC0351N **DESCRIPTION:** speaker

MECHANICAL DRAWING

