



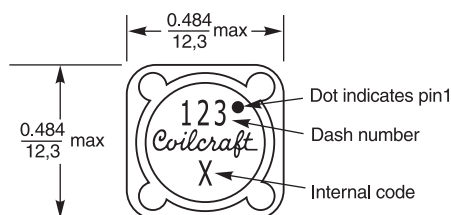


High Reliability Coupled Inductors ML612PND



Suggested Land Pattern




Dimensions are in $\frac{\text{inches}}{\text{mm}}$

The ML612PND series of coupled inductors was designed for high temperature applications – up to 155°C. The excellent coupling coefficient ($k \geq 0.98$) makes it ideal for use in SEPIC applications. In SEPIC topologies, the required inductance for each winding in a coupled inductor is half the value needed for two separate inductors, allowing selection of a part with lower DCR and higher current handling.

These inductors provide high inductance, high efficiency, excellent current handling and 500 V isolation in a very rugged part. They are well suited for use as VRM inductors in high-current DC-DC and VRM/VRD controllers.

They can also be used as two single inductors connected in series or parallel, as a common mode choke or as a 1 : 1 transformer.

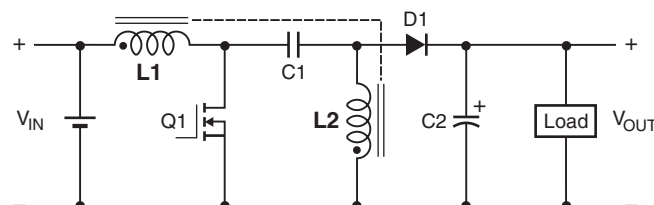

Typical SEPIC schematic

Refer to Application Note, Document 639,
“Selecting Coupled Inductors for SEPIC Applications”

Core material Ferrite

Core and winding loss [Go to online calculator](#)

Terminations Matte tin over nickel over phos bronze.

Weight: 3.8 – 4.6 g

Ambient temperature –55°C to +105°C with I_{rms} current

Maximum part temperature +155°C (ambient + temp rise).

Storage temperature Component: –55°C to +155°C.
Tape and reel packaging: –55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Winding-to-winding and winding-to-core isolation 500 Vrms

Enhanced crush-resistant packaging 500/13” reel;
Plastic tape: 24 mm wide, 0.4 mm thick, 16 mm pocket spacing,
8.1 mm pocket depth

ML612PND Series (1278)

Part number ¹	Inductance ² (μ H)	DCR max ³ (Ohms)	SRF (MHz) ⁴		Coupling coefficient typ	Leakage L typ (μ H)	Isat (A) ⁵			Irms (A)	
			min	typ			10% drop	20% drop	30% drop	both windings ⁶	one winding ⁷
ML612PND472MLZ	4.7 $\pm$ 20%	0.040	26.0	33.0	0.98	0.22	13.90	15.20	16.36	3.16	4.47
ML612PND562MLZ	5.6 $\pm$ 20%	0.046	24.0	30.0	0.98	0.23	13.38	14.86	15.74	2.87	4.06
ML612PND682MLZ	6.8 $\pm$ 20%	0.048	18.0	23.0	0.98	0.22	12.10	13.56	14.20	2.81	3.98
ML612PND822MLZ	8.2 $\pm$ 20%	0.055	16.0	20.0	0.98	0.34	10.30	11.52	12.20	2.76	3.90
ML612PND103MLZ	10 $\pm$ 20%	0.058	14.0	17.0	0.98	0.34	8.80	10.00	10.66	2.56	3.62
ML612PND123MLZ	12 $\pm$ 20%	0.062	12.0	15.0	0.98	0.36	8.20	9.18	9.74	2.48	3.50
ML612PND153MLZ	15 $\pm$ 20%	0.072	10.0	13.0	0.99	0.41	7.40	8.36	9.03	2.30	3.25
ML612PND183MLZ	18 $\pm$ 20%	0.080	9.6	12.0	0.99	0.37	6.50	7.38	7.86	2.18	3.08
ML612PND223MLZ	22 $\pm$ 20%	0.096	8.8	11.0	0.99	0.41	6.00	6.80	7.26	1.99	2.81
ML612PND273MLZ	27 $\pm$ 20%	0.120	8.0	10.0	0.99	0.43	5.80	6.56	7.02	1.78	2.52
ML612PND333MLZ	33 $\pm$ 20%	0.150	7.6	9.5	0.99	0.56	5.50	6.10	6.52	1.59	2.25
ML612PND393MLZ	39 $\pm$ 20%	0.161	6.8	8.5	0.99	0.64	4.70	5.26	5.60	1.54	2.18
ML612PND473MLZ	47 $\pm$ 20%	0.180	6.0	7.5	0.99	0.70	3.70	4.34	4.60	1.45	2.05
ML612PND563MLZ	56 $\pm$ 20%	0.190	5.6	7.0	0.99	0.76	3.60	4.18	4.50	1.41	2.00
ML612PND683MLZ	68 $\pm$ 20%	0.210	5.2	6.5	0.99	0.88	3.50	4.04	4.32	1.35	1.90
ML612PND823MLZ	82 $\pm$ 20%	0.280	4.0	5.0	0.99	0.85	3.30	3.72	4.02	1.16	1.65
ML612PND104MLZ	100 $\pm$ 20%	0.300	3.6	4.5	>0.99	0.90	2.80	3.24	3.46	1.13	1.59
ML612PND124KLZ	120 $\pm$ 10%	0.410	3.4	4.3	0.99	1.31	2.60	2.94	3.16	0.96	1.36
ML612PND154KLZ	150 $\pm$ 10%	0.460	3.3	4.1	>0.99	1.46	2.20	2.54	2.70	0.91	1.29
ML612PND184KLZ	180 $\pm$ 10%	0.510	3.2	4.0	>0.99	0.93	2.10	2.42	2.58	0.86	1.22
ML612PND224KLZ	220 $\pm$ 10%	0.690	2.7	3.4	>0.99	1.54	1.90	2.16	2.28	0.74	1.05
ML612PND274KLZ	270 $\pm$ 10%	0.900	2.5	3.1	>0.99	1.17	1.70	1.94	2.10	0.65	0.92
ML612PND334KLZ	330 $\pm$ 10%	1.02	2.3	2.9	0.99	4.14	1.50	1.70	1.84	0.61	0.86
ML612PND394KLZ	390 $\pm$ 10%	1.12	2.2	2.7	>0.99	1.64	1.40	1.60	1.70	0.58	0.82
ML612PND474KLZ	470 $\pm$ 10%	1.53	1.8	2.2	>0.99	1.25	1.30	1.50	1.60	0.50	0.70
ML612PND564KLZ	560 $\pm$ 10%	1.69	1.6	2.0	>0.99	2.68	1.20	1.34	1.46	0.47	0.67
ML612PND684KLZ	680 $\pm$ 10%	2.29	1.4	1.7	>0.99	2.11	1.00	1.08	1.22	0.41	0.58
ML612PND824KLZ	820 $\pm$ 10%	2.55	1.1	1.4	>0.99	2.39	0.900	1.04	1.18	0.39	0.55
ML612PND105KLZ	1000 $\pm$ 10%	2.87	1.0	1.3	>0.99	4.28	0.850	0.948	1.05	0.37	0.52

1. When ordering, please specify **screening** code:

ML612PND105KLZ

Screening: Z = Unscreened

Y = Unscreened (SLDC Option A)

W = Unscreened (SLDC Option B)

H = Group A screening per Coilcraft CP-SA-10001

G = Coilcraft CP-SA-10001 Group A (SLDC Option A)

D = Coilcraft CP-SA-10001 Group A (SLDC Option B)

- Screening performed to the document's latest revision.
- Custom screening also available
- Country of origin restrictions available; prefix option G.

- Inductance shown for each winding, measured at 100 kHz, 0.1 Vrms, 0 Adc on an Agilent/HP 4284A LCR meter or equivalent. When leads are connected in parallel, inductance is the same value. When leads are connected in series, inductance is four times the value.
- DCR is for each winding. When leads are connected in parallel, DCR is half the value. When leads are connected in series, DCR is twice the value.
- SRF measured using an Agilent/HP 4191A or equivalent. When leads are connected in parallel, SRF is the same value.
- DC current, at which the inductance drops the specified amount from its value without current. It is the sum of the current flowing in both windings.
- Equal current when applied to each winding simultaneously that causes a 40°C temperature rise from 25°C ambient.
- Maximum current when applied to one winding that causes a 40°C temperature rise from 25°C ambient.
- Electrical specifications at 25°C.

Refer to Doc 639 "Selecting Coupled Inductors for SEPIC Applications."

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Coupled Inductor Core and Winding Loss Calculator

This web-based utility allows you to enter frequency, peak-to-peak (ripple) current, and Irms current to predict temperature rise and overall losses, including core loss. [Go to online calculator.](#)



CRITICAL PRODUCTS & SERVICES

© Coilcraft, Inc. 2026

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363


Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document ML704-2 Revised 04/19/23

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

ML612PND Series (1278)

Typical L vs Current

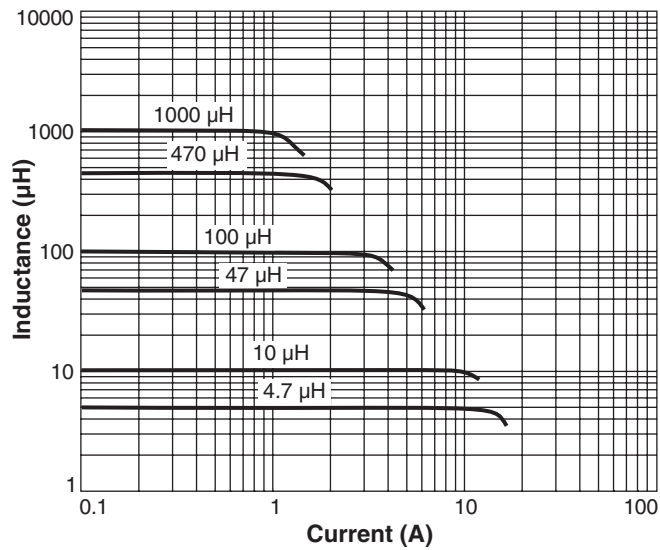

Typical L vs Frequency

