

**SERIES:** PDRB-10 | **DESCRIPTION:** AC-DC DIN RAIL POWER SUPPLY

**FEATURES**

- universal input (90~264 Vac)
- integrated fuse and surge protection
- 3,000 Vac input/output isolation voltage
- DC ON/LOW LED indicators
- over voltage/current protection
- spring and screw terminal options
- adjustable output via trim POT
- UL/cUL, TUV, CE certified



| MODEL      | output voltage | output current max | output power max | ripple and noise <sup>1</sup> | efficiency <sup>2</sup> |
|------------|----------------|--------------------|------------------|-------------------------------|-------------------------|
|            | (Vdc)          | (A)                | (W)              | max (mVp-p)                   | typ (%)                 |
| PDRB-10-5  | 5              | 2.0                | 10               | 50                            | 73                      |
| PDRB-10-12 | 12             | 0.84               | 10               | 50                            | 75                      |
| PDRB-10-15 | 15             | 0.67               | 10               | 50                            | 76                      |
| PDRB-10-24 | 24             | 0.42               | 10               | 50                            | 76                      |

Notes: 1. At full load, nominal input, 20 MHz bandwidth oscilloscope.  
 2. At nominal input.  
 3. All specifications are measured at Ta=25°C, nominal input voltage, and rated output load unless otherwise specified.

**PART NUMBER KEY**
**PDRB-10 - XX X**

Base Number

Output Voltage

 Terminal Type:  
 "blank" = spring terminal  
 A = screw terminal

**INPUT**

| parameter       | conditions/description | min | typ | max  | units |
|-----------------|------------------------|-----|-----|------|-------|
| voltage         |                        | 90  |     | 264  | Vac   |
|                 |                        | 120 |     | 375  | Vdc   |
| frequency       |                        | 47  |     | 63   | Hz    |
| current         | at 90 Vac, full load   |     |     | 300  | mA    |
| inrush current  | at 115 Vac, full load  |     |     | 15   | A     |
|                 | at 230 Vac, full load  |     |     | 30   | A     |
| leakage current | input to output        |     |     | 0.25 | mA    |
|                 | input to FG            |     |     | 3.5  | mA    |

**OUTPUT**

| parameter                                       | conditions/description                        | min  | typ | max   | units |
|-------------------------------------------------|-----------------------------------------------|------|-----|-------|-------|
| capacitive load                                 |                                               |      |     | 3,500 | μF    |
| initial set point accuracy                      |                                               |      |     | ±1    | %     |
| line regulation                                 | at full load, V in min to V in max            |      |     | ±1    | %     |
| load regulation                                 | at Vi nom, 0~100% load                        |      |     | ±2    | %     |
| adjustability                                   | via built in trim pot, 80% load               |      |     |       |       |
|                                                 | 5, 12, 15 Vdc output models                   | 90   |     | 115   | %     |
|                                                 | 24 Vdc output models                          | 90   |     | 120   | %     |
| rated continuous loading at max trim voltage    | 5 Vdc output models (5.75 Vdc)                |      |     | 1.7   | A     |
|                                                 | 12 Vdc output models (13.8 Vdc)               |      |     | 0.72  | A     |
|                                                 | 15 Vdc output models (17.25 Vdc)              |      |     | 0.58  | A     |
|                                                 | 24 Vdc output models (28.8 Vdc)               |      |     | 0.34  | A     |
| start-up time                                   | at Vi nom, full load                          |      |     | 1.0   | s     |
|                                                 | at Vi nom, full load with max capacitive load |      |     | 1.5   | s     |
| rise time                                       | at Vi nom, full load                          |      |     | 150   | ms    |
|                                                 | at Vi nom, full load with max capacitive load |      |     | 500   | ms    |
| hold-up time                                    | at 115 Vac, full load                         | 25   |     |       | ms    |
|                                                 | at 230 Vac, full load                         | 100  |     |       | ms    |
| fall time                                       | at Vi nom, full load                          |      |     | 150   | ms    |
| transient recovery time                         | at Vi nom, 100~50% load                       |      |     | 2     | ms    |
| switching frequency                             | at Vi nom, full load                          |      | 132 |       | kHz   |
| temperature coefficient                         |                                               |      |     | ±0.03 | %/°C  |
| power back immunity                             | at Vi nom, full load, for 1 second            |      |     |       |       |
|                                                 | 5 Vdc output models                           | 7.5  |     |       | Vdc   |
|                                                 | 12 Vdc output models                          | 18   |     |       | Vdc   |
|                                                 | 15 Vdc output models                          | 22   |     |       | Vdc   |
|                                                 | 24 Vdc output models                          | 35   |     |       | Vdc   |
|                                                 | 5 Vdc output models                           | 3.5  |     | 4.5   | Vdc   |
|                                                 | 12 Vdc output models                          | 9.0  |     | 10.8  | Vdc   |
|                                                 | 15 Vdc output models                          | 11.0 |     | 13.5  | Vdc   |
| DC ON indicator threshold at start-up (GREEN)   | 24 Vdc output models                          | 18   |     | 21.6  | Vdc   |
|                                                 | 5 Vdc output models                           | 3.5  |     | 4.5   | Vdc   |
|                                                 | 12 Vdc output models                          | 9.0  |     | 10.8  | Vdc   |
|                                                 | 15 Vdc output models                          | 11.0 |     | 13.5  | Vdc   |
| DC LOW indicator threshold after start-up (RED) | 24 Vdc output models                          | 18   |     | 21.6  | Vdc   |

## PROTECTIONS

| parameter                | conditions/description             | min   | typ | max   | units |
|--------------------------|------------------------------------|-------|-----|-------|-------|
| over voltage protection  | at Vi nom, 80% load, auto recovery |       |     |       |       |
|                          | 5 Vdc output models                | 6.25  |     | 7.25  | Vdc   |
|                          | 12 Vdc output models               | 15    |     | 17.4  | Vdc   |
|                          | 15 Vdc output models               | 18.75 |     | 21.75 | Vdc   |
|                          | 24 Vdc output models               | 30    |     | 34.8  | Vdc   |
| over current protection  | hiccup, auto recovery (see curve)  | 110   |     | 165   | %     |
| short circuit protection | hiccup, auto recovery              |       |     |       |       |

## SAFETY & COMPLIANCE

| parameter            | conditions/description                                                                                                                                                                                                   | min   | typ     | max | units |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|---------|-----|-------|
| isolation voltage    | input to output for 1 minute                                                                                                                                                                                             | 3,000 |         |     | Vac   |
|                      |                                                                                                                                                                                                                          | 4,242 |         |     | Vdc   |
|                      | input to FG for 1 minute                                                                                                                                                                                                 | 1,500 |         |     | Vac   |
|                      |                                                                                                                                                                                                                          | 2,121 |         |     | Vdc   |
| isolation resistance | output to FG for 1 minute                                                                                                                                                                                                | 500   |         |     | Vac   |
|                      |                                                                                                                                                                                                                          | 710   |         |     | Vdc   |
| isolation resistance | input to output at 500 Vdc                                                                                                                                                                                               | 100   |         |     | MΩ    |
| safety approvals     | UL 508, UL 1310, UL/EN 62368-1<br>ISA 12.12.01 (Class I, Div 2, Groups A~D)                                                                                                                                              |       |         |     |       |
| safety class         | Class I                                                                                                                                                                                                                  |       |         |     |       |
| EMI/EMC              | EN 55032 Class B, EN 55024, ENV 50204,<br>EN 61204-3, EN 61000-3-2, EN 61000-3-3,<br>EN 61000-6-2, EN 61000-6-3, EN 61000-4-2,<br>EN 61000-4-3, EN 61000-4-4, EN 61000-4-5,<br>EN 61000-4-6, EN 61000-4-8, EN 61000-4-11 |       |         |     |       |
| pollution degree     | 2                                                                                                                                                                                                                        |       |         |     |       |
| degree of protection | IP20                                                                                                                                                                                                                     |       |         |     |       |
| MTBF                 | as per Bellcore Issue 6 at 40 °C, GB                                                                                                                                                                                     |       |         |     |       |
|                      | 5 Vdc output models                                                                                                                                                                                                      |       | 728,000 |     | hours |
|                      | 12 Vdc output models                                                                                                                                                                                                     |       | 767,000 |     | hours |
|                      | 15 Vdc output models                                                                                                                                                                                                     |       | 780,000 |     | hours |
|                      | 24 Vdc output models                                                                                                                                                                                                     |       | 808,000 |     | hours |
| RoHS                 | yes                                                                                                                                                                                                                      |       |         |     |       |

Notes: 4. The power supply is considered a component which will be installed into final equipment. The final equipment still must be tested to meet the necessary EMC directives.

## ENVIRONMENTAL

| parameter             | conditions/description                                                                                | min | typ | max   | units |
|-----------------------|-------------------------------------------------------------------------------------------------------|-----|-----|-------|-------|
| operating temperature | see derating curves                                                                                   | -20 |     | 71    | °C    |
| storage temperature   |                                                                                                       | -25 |     | 85    | °C    |
| humidity              | non-condensing                                                                                        | 20  |     | 95    | %     |
| altitude              |                                                                                                       |     |     | 5,000 | m     |
| vibration             | meets IEC 60068-2-6 (Mounting on rail: 10~500 Hz, 2 G, along X,Y,Z axis, for 60 minutes on each axis) |     |     |       |       |
| shock                 | meets IEC 60068-2-27 (15 G, 11 ms, 3 axis, 6 faces, 3 times for each face)                            |     |     |       |       |


## MECHANICAL

| parameter              | conditions/description                                                            | min | typ | max | units |
|------------------------|-----------------------------------------------------------------------------------|-----|-----|-----|-------|
| dimensions             | 90.00 x 22.50 x 114.00 (3.60 x 0.89 x 4.49 inches)                                |     |     |     | mm    |
| material               | plastic                                                                           |     |     |     |       |
| weight                 |                                                                                   |     | 120 |     | g     |
| cooling                | natural convection                                                                |     |     |     |       |
| input/output connector | spring terminal: accepts 24~14 AWG wire<br>screw terminal: accepts 26~12 AWG wire |     |     |     |       |

## MECHANICAL DRAWING

units: mm [inch]  
 tolerance:  
 $X \leq 30.00$ :  $\pm 0.30$  [ $\pm 0.01$ ]  
 $30.00 < X \leq 120.00$ :  $\pm 0.50$  [ $\pm 0.02$ ]  
 unless otherwise noted


| TERMINAL CONNECTIONS |                                                                                    |
|----------------------|------------------------------------------------------------------------------------|
| TERMINAL             | Function                                                                           |
| 1                    | V+                                                                                 |
| 2                    | V-                                                                                 |
| 3                    |  |
| 4                    | N                                                                                  |
| 5                    | L                                                                                  |

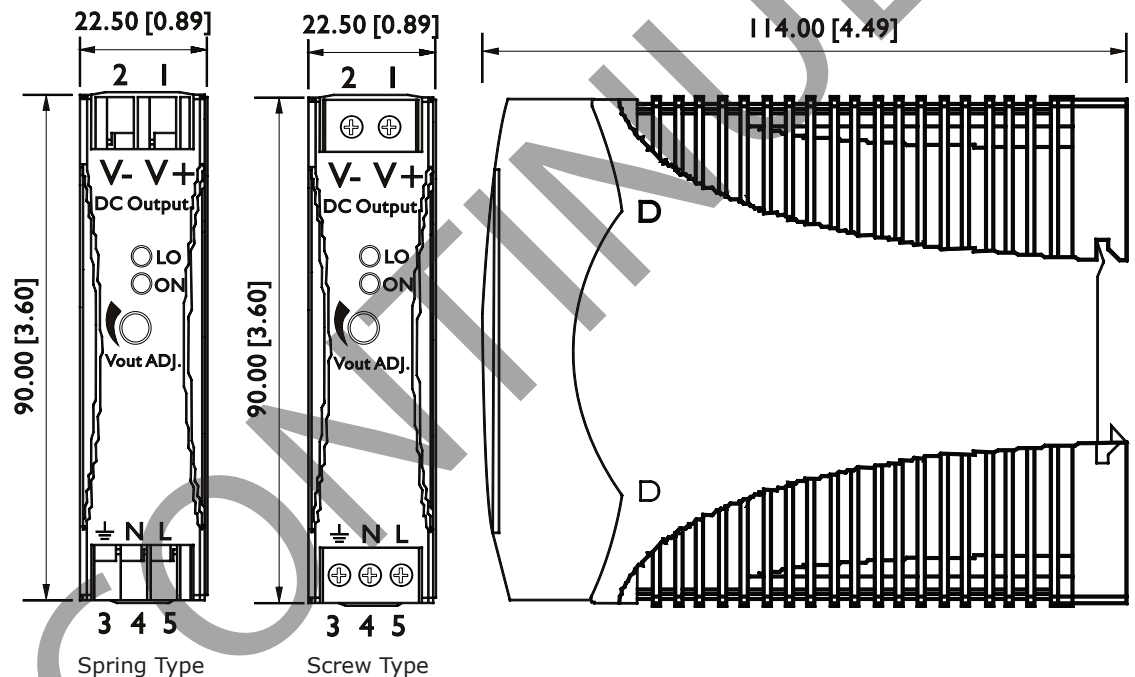

| INSTALLATION |                                                  |                                         |
|--------------|--------------------------------------------------|-----------------------------------------|
|              | Spring                                           | Screw                                   |
| DIN RAIL     | TS35/7.5 or TS35/15                              |                                         |
| Cable        | flexible/solid, copper conductors only, 60/75°C  |                                         |
| Wire Range   | 24~14 AWG<br>(0.2~2 mm <sup>2</sup> )            | 26~12 AWG<br>(0.2~2.5 mm <sup>2</sup> ) |
| Strip Length | 10 mm                                            | 4~5 mm                                  |
| Screw Torque | --                                               | 5 lb·in                                 |
| Position     | Vertical                                         |                                         |
| Cooling      | Natural convection, 25 mm clearance on all sides |                                         |


## DERATING CURVE

**TEMPERATURE DERATING CURVE**

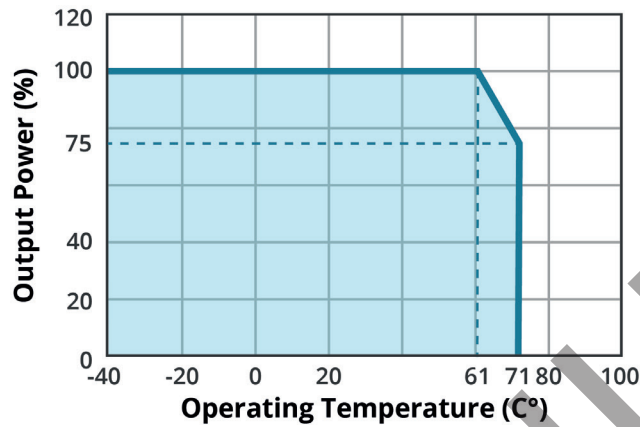


## EFFICIENCY CURVES

**EFFICIENCY VS OUTPUT LOAD  
(PDRB-10-24)**

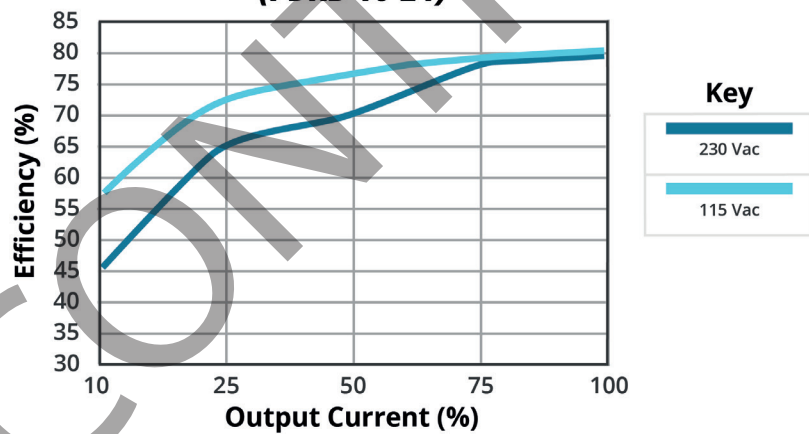

## CURRENT LIMITED CURVE

**OUTPUT VOLTAGE VS TIME  
HICCUP MODE**

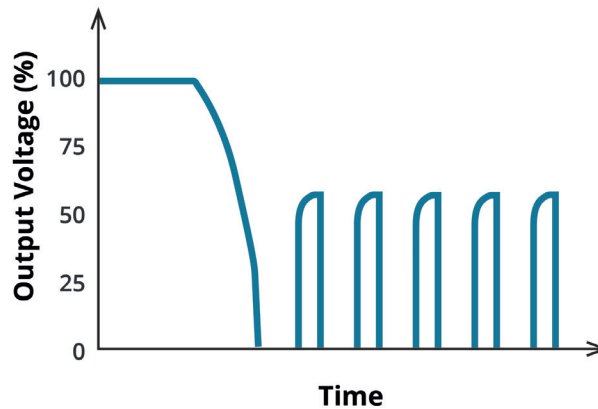

## REVISION HISTORY

| rev. | description                            | date       |
|------|----------------------------------------|------------|
| 1.0  | initial release                        | 06/13/2019 |
| 1.01 | updated safety certifications          | 08/04/2020 |
| 1.02 | derating and efficiency curves updated | 03/03/2022 |

The revision history provided is for informational purposes only and is believed to be accurate.



**CUI INC**  
a bel group

**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.