


Specification Sheet

Part Number: 156-00049

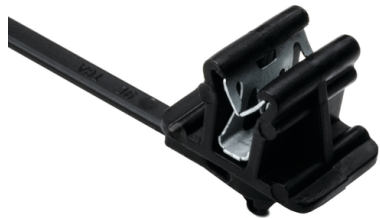

Edge Clip applies easily to plastic and metal sheets without the need for a mounting hole

Edge Clip provides low insertion force and high extraction force ideal for assembly environments

Rotatable Cable Tie & Edge Clip, 6.3" Long, Outside Serrated, PA66HS, Black, 500/bg

Article Number 156-00049

Type CBT30MR

Color Black (BK)

Quantity Per carton

Product Description HellermannTyton's Two-Piece Edge Clip with Cable Tie Assemblies are designed specifically to route bundles by securing them to the edge of a plastic or metal sheet without the need for a mounting hole. The clip is easy to secure and the extraction force is high due to the integrated metal clamp that holds the edge clip in place. The clips are available in 90° and 360° models for use with different types of cable tie. On the CBT30MR the bundle runs at the side of the clip and the cable tie is outside serrated to reduce bundle abrasion.

Short Description Rotatable Cable Tie & Edge Clip, 6.3" Long, Outside Serrated, PA66HS, Black, 500/bg

Global Part Name CBT30MR-PA66HS/POM-BK

Minimum Tensile Strength (Imperial) 30

Minimum Tensile Strength (Metric) 135

Length L (Imperial) 6.3

Length L (Metric) 160

Fixation Method Edge Clip

Identification Plate Position none

Variant Inside Serrated

Width W (Imperial) 0.14

Width W (Metric) 3.5

Bundle Diameter Min (Imperial) 0.06

Bundle Diameter Min (Metric) 1.5

Bundle Diameter Max (Imperial) 1.26

Bundle Diameter Max (Metric) 32.0

Cable Tie Head Length (Imperial) 3.5

Height H (Imperial) 0.05

Height H (Metric)	1.2
Cable Tie Width Max (Imperial)	0.14
Cable Tie Width Max (Metric)	3.5
Panel Thickness Min (Imperial)	0.04
Panel Thickness Max (Imperial)	0.12
Panel Thickness Min (Metric)	1.0
Panel Thickness Max (Metric)	2.5
Material	Polyacetal (POM) Polyamide 6.6 heat stabilized (PA66HS)
Foot Part Material	POM
Material Shortcut	PA66HS POM
Material Cable Tie	Polyamide 6.6 heat stabilized (PA66HS)
Flammability	UL 94 HB
UV Resistant (Yes/No)	No
Use Conditions	For Indoor and Outdoor Use
Operating Temperature	-40°F to +194°F (-40°C to +90°C)

Reach Compliant (Article 33) Yes

ROHS Compliant Yes

Package Quantity (Imperial) 500

Package Quantity (Metric) 500

Customs Number 3926909988