



Mini-Circuits

MMIC SURFACE MOUNT


Power Splitter/Combiner

WP4R+

4 Way-0° 50Ω 2300 to 2700 MHz

FEATURES

- Excellent Isolation, Typ. 26 dB
- Good Phase Unbalance, Max. 6 deg.
- Good Amplitude Unbalance, Max. 0.4 dB
- Small Size, 3x3 mm
- High ESD Level
- Aqueous Washable



Generic photo used for illustration purposes only

CASE STYLE: DQ1225

+RoHS CompliantThe +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- WLAN
- WIMAX
- ISM

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Frequency Range		2300		2700	MHz
Insertion Loss* (Above 6.0 dB)	2300-2700		0.7	1.4	dB
Isolation	2300-2700	18	26		dB
Amplitude Unbalance	2300-2700			0.4	dB
Phase Unbalance	2300-2700			6	deg.
VSWR (Port S)	2300-2700		1.35		:1
VSWR (Ports 1,2,3,4)	2300-2700		1.35		:1


*Includes fixture loss, 0.2 dB typ.

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C
Power Input (as a Splitter)	1.5 W max.
Internal Dissipation	0.375 W max.

Permanent damage may occur if any of these limits are exceeded.

ELECTRICAL SCHEMATIC

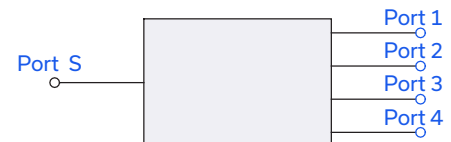REV. E
ECO-026468
WP4R+
MCL NY
250806

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 1 OF 3



Mini-Circuits

MMIC SURFACE MOUNT


Power Splitter/Combiner

WP4R+

4 Way-0° 50Ω 2300 to 2700 MHz

PAD CONNECTIONS

SUM PORT	2
PORT 1	12
PORT 2	10
PORT 3	6
PORT 4	4
GROUND	1,3,5,7,8,9,11, Paddle

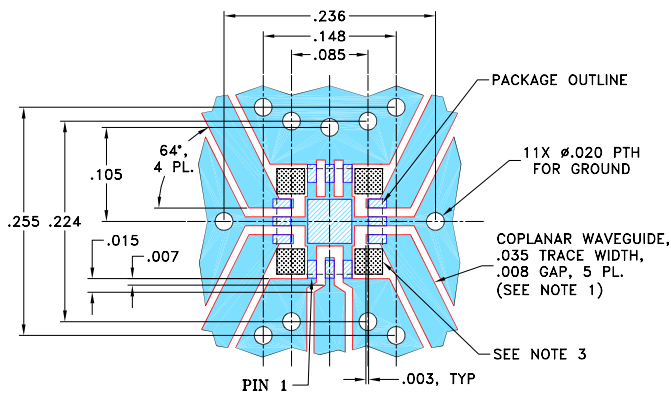
DEMO BOARD MCL P/N: TB-WP4R+
SUGGESTED PCB LAYOUT (PL-259)

NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .020" $\pm$.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. SIGNAL TRACES ARE NOT ALLOWED INSIDE HATCHED AREAS (APPROX. .030 X .030) AT 4 PLACES AS SHOWN.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK


OUTLINE DRAWING

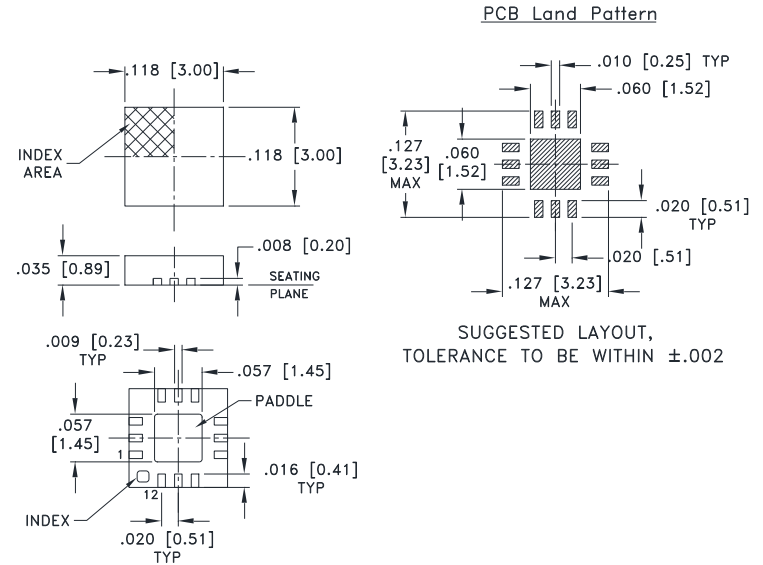

Weight: .02 Grams
Dimensions are in inches [mm]. Tolerances in inches: 2 Pl. $\pm$.01; 3 Pl. $\pm$.004 inches

TAPE & REEL INFORMATION: F66

PRODUCT MARKING

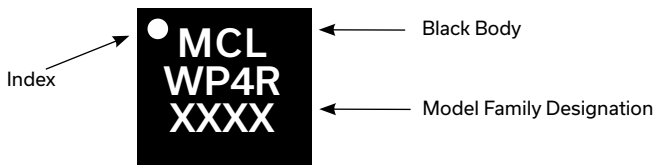

Marking may contain other features or characters for internal lot control.

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 2 OF 3



Mini-Circuits

MMIC SURFACE MOUNT

Power Splitter/Combiner




WP4R+

4 Way-0° 50Ω 2300 to 2700 MHz

TYPICAL PERFORMANCE DATA AND CHARTS

Frequency (MHz)	Total Loss ¹ (dB)				Amplitude Unbalance (dB)	Isolation (dB)			Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	2-3	3-4						
2300.00	6.68	6.81	6.79	6.69	0.13	29.97	26.31	28.98	0.68	1.26	1.36	1.26	1.28	1.31
2325.00	6.67	6.79	6.77	6.67	0.12	29.10	26.25	28.32	0.65	1.24	1.35	1.25	1.27	1.30
2350.00	6.65	6.77	6.75	6.66	0.12	28.27	26.10	27.65	0.67	1.23	1.35	1.25	1.26	1.30
2375.00	6.64	6.76	6.74	6.65	0.12	27.52	25.88	27.01	0.70	1.22	1.34	1.24	1.25	1.30
2400.00	6.64	6.74	6.73	6.64	0.11	26.81	25.59	26.40	0.79	1.22	1.34	1.23	1.24	1.29
2450.00	6.63	6.73	6.71	6.64	0.10	25.59	24.92	25.29	0.96	1.24	1.33	1.21	1.23	1.28
2500.00	6.63	6.72	6.70	6.64	0.09	24.56	24.19	24.33	1.19	1.28	1.33	1.20	1.22	1.28
2525.00	6.64	6.73	6.70	6.65	0.08	24.10	23.82	23.91	1.30	1.30	1.32	1.20	1.21	1.28
2550.00	6.65	6.73	6.70	6.65	0.08	23.69	23.46	23.51	1.39	1.33	1.32	1.19	1.20	1.27
2575.00	6.66	6.73	6.71	6.66	0.07	23.30	23.13	23.14	1.47	1.35	1.32	1.19	1.20	1.27
2600.00	6.67	6.74	6.72	6.68	0.07	22.95	22.80	22.80	1.57	1.38	1.32	1.18	1.19	1.27
2625.00	6.68	6.75	6.72	6.69	0.06	22.63	22.47	22.49	1.67	1.41	1.32	1.18	1.19	1.27
2650.00	6.70	6.76	6.73	6.70	0.06	22.33	22.17	22.20	1.75	1.44	1.32	1.17	1.19	1.27
2675.00	6.71	6.77	6.74	6.72	0.05	22.05	21.87	21.92	1.85	1.47	1.31	1.17	1.18	1.27
2700.00	6.73	6.78	6.75	6.73	0.05	21.79	21.60	21.67	1.94	1.50	1.31	1.17	1.18	1.27

1. Total Loss = Insertion Loss + 6 dB splitter loss.

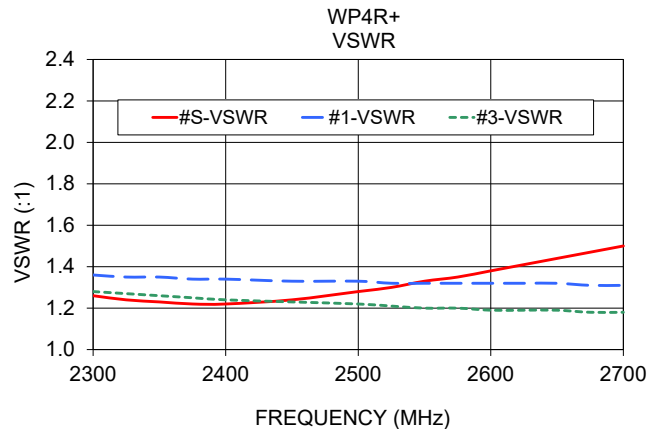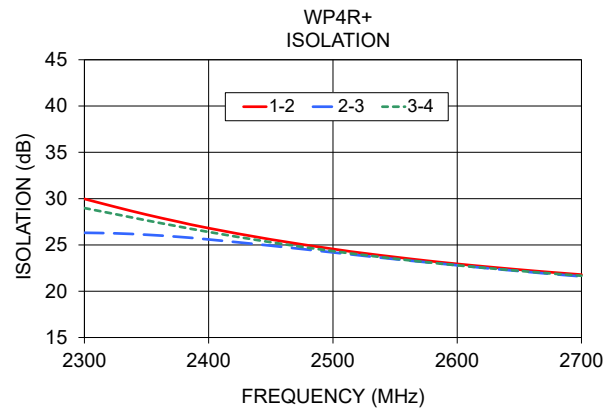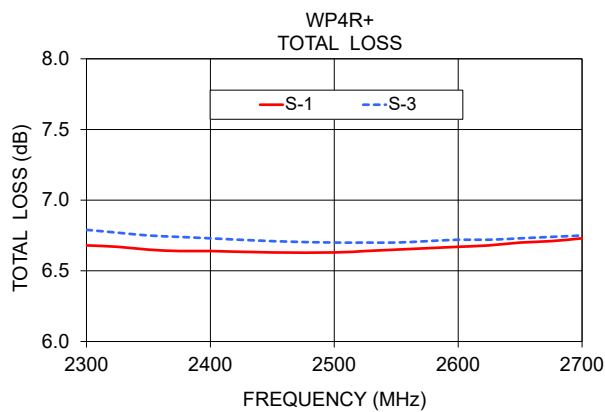

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

