

## SEK-18 SV MA STD ANGWW RKZ 20P PLS4

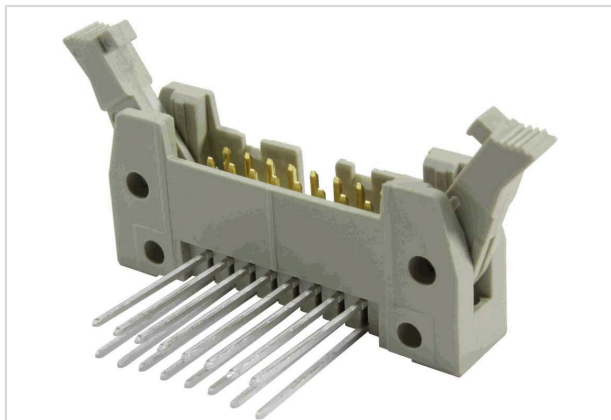


Image is for illustration purposes only. Please refer to product description.

|                    |   |
|--------------------|---|
| Part number        | 09 18 520 5916  |
| Specification      | SEK-18 SV MA STD ANGWW RKZ 20P PLS4   |
| HARTING eCatalogue | <a href="https://b2b.harting.com/09185205916">https://b2b.harting.com/09185205916</a> |

### Identification

|                            |                |
|----------------------------|----------------|
| Category                   | Connectors     |
| Series                     | SEK Standard   |
| Element                    | Male connector |
| Description of the contact | Angled         |

### Version

|                    |                   |
|--------------------|-------------------|
| Termination method | Wrap termination  |
| Connection type    | PCB to cable      |
| Number of contacts | 20                |
| Termination length | 15 mm             |
| Locking type       | With short levers |

### Technical characteristics

|                                    |                           |
|------------------------------------|---------------------------|
| Dimensions wire wrap post          | 0.6 x 0.6 mm              |
| Contact rows                       | 2                         |
| Contact spacing (termination side) | 2.54 mm                   |
| Rated current                      | 1 A                       |
| Insulation resistance              | $>10^9 \Omega$            |
| Contact resistance                 | $\leq 20 \text{ m}\Omega$ |
| Limiting temperature               | -55 ... +125 °C           |
| Performance level                  | NM 30 (S4)                |
| Mating cycles                      | $\geq 250$                |
| Test voltage $U_{r.m.s.}$          | 1 kV                      |



Pushing Performance  
Since 1945

## Technical characteristics

|                 |                        |
|-----------------|------------------------|
| Isolation group | IIIa (175 ≤ CTI < 400) |
|-----------------|------------------------|

## Material properties

|   |  |
|---|--|
| Material (insert)                         | Thermoplastic resin (PBT)                                      |
| Colour (insert)                           | Grey   |
| Material (contacts)                       | Copper alloy   |
| Surface (contacts)                        | Noble metal over Ni Mating side<br>Sn over Ni Termination side |
| Layer thickness                           | ≥0.76 μm   |
| Layer thickness                           | ≥30 μinch  |
| Material flammability class acc. to UL 94 | V-0  |
| RoHS                                      | compliant  |
| ELV status                                | compliant  |
| China RoHS                                | e  |
| REACH Annex XVII substances               | Not contained  |
| REACH ANNEX XIV substances                | Not contained  |
| REACH SVHC substances                     | Not contained  |
| California Proposition 65 substances      | Yes  |
| California Proposition 65 substances      | Antimony trioxide<br>Lead<br>Nickel                            |
| Fire protection on railway vehicles       | EN 45545-2 (2020-08)   |
| Requirement set with Hazard Levels        | R26  |

## Specifications and approvals

|                        |  |
|------------------------|--|
| Specifications         | IEC 60603-13   |
| UL / CSA               | UL 1977 ECBT2.E102079<br>CSA-C22.2 No. 182.3 ECBT8.E102079 |
| Railway classification | F3/I3  |

## Commercial data

|                                |             |
|--------------------------------|-------------|
| Packaging size                 | 100         |
| Net weight                     | 13.1 g      |
| Country of origin              | Switzerland |
| European customs tariff number | 85366990    |

## Commercial data

|        |  |
|--------|--|
| GTIN   | 5713140029668                            |
| ETIM   | EC002637                                 |
| eCl@ss | 27460201 PCB connector (board connector) |

## Cross section of solder termination

