


# Duplex Multimode 62.5/125 Fiber Patch Cable (MTRJ/SC), 15M (50 ft.)

MODEL NUMBER: N310-15M

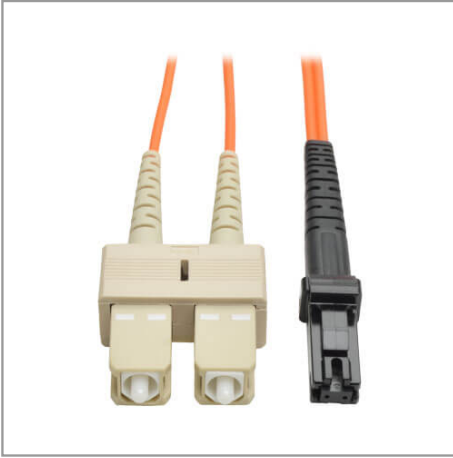

### Highlights

- Premium PVC 62.5/125µm multimode patch cables
- Attenuation loss meets or exceeds the latest industry standards

### System Requirements

- Any fiber optic hardware or NIC card requiring Multimode Duplex cable with MT-RJ/SC connectors

### Package Includes

- 15-meter Duplex MMF Cable MTRJ/SC 62.5/125 Fiber

### Description

Tripp Lite's 15-meter multimode duplex fiber optic MTRJ/SC patch cable is manufactured from 62.5/125 zipcord fiber. The cable has MTRJ to SC connectors, a PVC jacket and is FDDI and OFNR rated. Duplex multimode fiber is most commonly used in LAN applications.

### Features

- Manufactured from 62.5/125 duplex (zipcord) fiber
- PVC jacket
- Length: 15-meters (50ft) Connectors: MTRJ to 2 SC
- Insertion loss testing performed on every connector (0.2db typical) and provided with cable
- Fiber made from glass (not a polymer)
- Fiber optic distributed data interface (FDDI) rated - OFNR (riser rated )

## Specifications

OVERVIEW	
UPC Code	037332124937
Technology	Multimode
Optical Mode	OM1
CONNECTIONS	
Side A - Connector 1	MTRJ DUPLEX (MALE)
Side B - Connector 1	SC DUPLEX (MALE)
Endface Polish	PC

<b>PHYSICAL</b>	
Cable Jacket Color	Orange
Connector Color	White; Black
Cable Jacket Material	LSZH
Cable Jacket Rating	OFNR
Clad Diameter (microns)	125
Core Diameter (microns)	62.5
Number of Fibers	2
Cable Length (ft.)	49.2
Cable Length (m)	15.00
Cable Length (in.)	590.6
Minimum Bend Radius	20MM (Dynamic); 10MM (Static)
Shipping Dimensions (hwd / in.)	9.00 x 7.00 x 0.75
Shipping Dimensions (hwd / cm)	22.86 x 17.78 x 1.90
Shipping Weight (lbs.)	0.19
Shipping Weight (kg)	0.09
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	-4 to 140 °F (-20 to 60 °C)
Storage Temperature Range	-4 to 140 °F (-20 to 60 °C)
Operating Humidity Range	5% to 85% RH, Non-Condensing
Storage Humidity Range	35% to 65% RH, Non-Condensing
<b>COMMUNICATIONS</b>	
Network Compatibility	1 Gbps (Gigabit); 10 Gbps
Attenuation @ 850NM	3.0dB/Km
Insertion Loss	MTRJ0.50dB; SC0.20dB
<b>FEATURES &amp; SPECIFICATIONS</b>	
Push/Pull Tabs	No
Breakout	No
Trunk	No
<b>STANDARDS &amp; COMPLIANCE</b>	
Product Compliance	RoHS; REACH
<b>WARRANTY &amp; SUPPORT</b>	



Powering Business Worldwide



Product Warranty Period (Worldwide)	Lifetime limited warranty
--	---------------------------

1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
<https://tripplite.eaton.com>

© 2025 Eaton. All Rights Reserved.  
Eaton is a registered trademark. All other trademarks  
are the property of their respective owners.