


1.Features

- $V_{DS(V)}=30V$
- $I_D=30A$
- $R_{DS(ON)}<13.5m\Omega(V_{GS}=10V)$
- Fast switching MOSFET for SMPS
- Optimized technology for DC/DC converters
- Avalanche rated
- Very low on-resistance $R_{DS(ON)}$
- Excellent gate charge x $R_{DS(ON)}$ product (FOM)

2.Pinning information

Pin	Symbol	Description
1	G	GATE
2	D	DRAIN
3	S	SOURCE

TO-252(DPAK)
top view

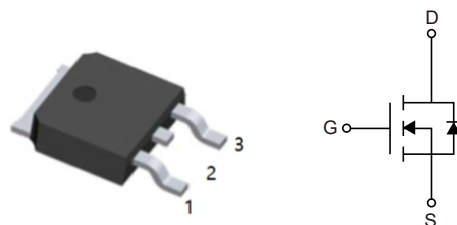

3.Absolute Maximum Ratings $T_J=25^{\circ}C$

Parameter	Symbol	Conditions	Rating	Units
Continuous drain current	I_D	$V_{GS}=10V, T_C=25^{\circ}C$	30	A
		$V_{GS}=10V, T_C=100^{\circ}C$	26	A
		$V_{GS}=4.5V, T_C=25^{\circ}C$	30	A
		$V_{GS}=4.5V, T_C=100^{\circ}C$	21	A
Pulsed drain current ²⁾	$I_{D,pulse}$	$T_C=25^{\circ}C$	210	A
Avalanche energy, single pulse ³⁾	I_{AS}	$T_C=25^{\circ}C$	30	A
Avalanche energy, single pulse	E_{AS}	$I_D=10A, R_{GS}=25\Omega$	20	mJ
Reverse diode dv/dt	dv/dt	$I_D=30A, V_{DS}=24V$ $di/dt=200 A/\mu s, T_{J,max}=175^{\circ}C$	6	kV/ μs
Gate source voltage	V_{GS}		± 20	V
Power dissipation	P_{tot}	$T_C=25^{\circ}C$	31	W
storage temperature	T_J, T_{STG}		-55 to 175	$^{\circ}C$
IEC climatic category; DIN IEC 68-1			55/175/56	



4. Electrical Characteristic (T_J=25°C unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Thermal resistance, junction -case	R _{thJC}				4.9	K/W
SMD version, device on PCB	R _{thJA}	minimal footprint			75	K/W
		6 cm ² cooling area ⁴⁾			50	K/W
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} =0V, I _D =1mA	30			V
Gate threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	1	1.7	2.5	V
Zero gate voltage drain current	I _{DSS}	V _{DS} =30V, V _{GS} =0V, T _J =25°C		0.1	1	μA
		V _{DS} =30V, V _{GS} =0V, T _J =125°C		10	100	μA
Gate-source leakage current	I _{GSS}	V _{GS} =20V, V _{DS} =0V		10	100	nA
Drain-source on-state resistance ⁵⁾	R _{DS(ON)}	V _{GS} =4.5V, I _D =20A		10	20.5	mΩ
		V _{GS} =10V, I _D =30A		8	13.5	mΩ
Gate resistance	R _G			1.2		Ω
Transconductance	g _{FS}	V _{DS} >2 I _D R _{DS(ON)max} , I _D =30A	22	43		S
Input capacitance	C _{iss}	V _{GS} =0V, V _{DS} =15V, f=1MHz		770	1000	pF
Output capacitance	C _{oss}			350	470	pF
Reverse transfer capacitance	C _{rss}			16		pF
Turn-on delay time	t _{D(on)}	V _{DD} =15V, V _{GS} =10V I _D =30A, R _G =1.6Ω		3		ns
Rise time	t _r			3		ns
Turn-off delay time	t _{D(off)}			12		ns
Fall time	t _f			2.2		ns
Gate Charge Characteristics ⁶⁾						
Gate to source charge	Q _{gs}	V _{DD} =15V, I _D =30A V _{GS} =0 to 4.5V		2.7		nC
Gate charge at threshold	Q _{g(th)}			1.2		nC
Gate to drain charge	Q _{gd}			1.2		nC
Switching charge	Q _{SW}			2.6		nC
Gate charge total	Q _g			4.8	6.4	nC
Gate plateau voltage	V _{plateau}			3.5		V




Gate charge total	Q_g	$V_{DD}=15V, I_D=30A, V_{GS}=0 \text{ to } 10V$		10		nC
Gate charge total, sync.FET	$Q_{g(sync)}$	$V_{DS}=0.1V, V_{GS}=0 \text{ to } 4.5V$		4.2	5.5	nC
Output charge	Q_{oss}	$V_{DD}=15V, V_{GS}=0V$		9		nC
Diode continuous forward current	I_S	$T_C=25^\circ C$			25	A
Diode pulse current	$I_{S,pulse}$				210	A
Diode forward voltage	V_{SD}	$V_{GS}=0V, I_F=30A, T_J=25^\circ C$		0.98	1.2	V
Reverse recovery charge	Q_{rr}	$V_R=15V, I_F=I_S, di_F/dt=400A/\mu s$			10	nC

Notes:

- ¹⁾ J-STD20 and JESD22
- ²⁾ See figure 3 for more detailed information.
- ³⁾ See figure 13 for more detailed information.
- ⁴⁾ Device on 40 mm x 40 mm x 1.5 mm epoxy PCB FR4 with 6 cm² (one layer, 70 μm thick) copper area for drain connection.
PCB is vertical in still air.
- ⁵⁾ Measured from drain tab to source pin.
- ⁶⁾ See figure 16 for gate charge parameter definition.




5.1Typical characteristic

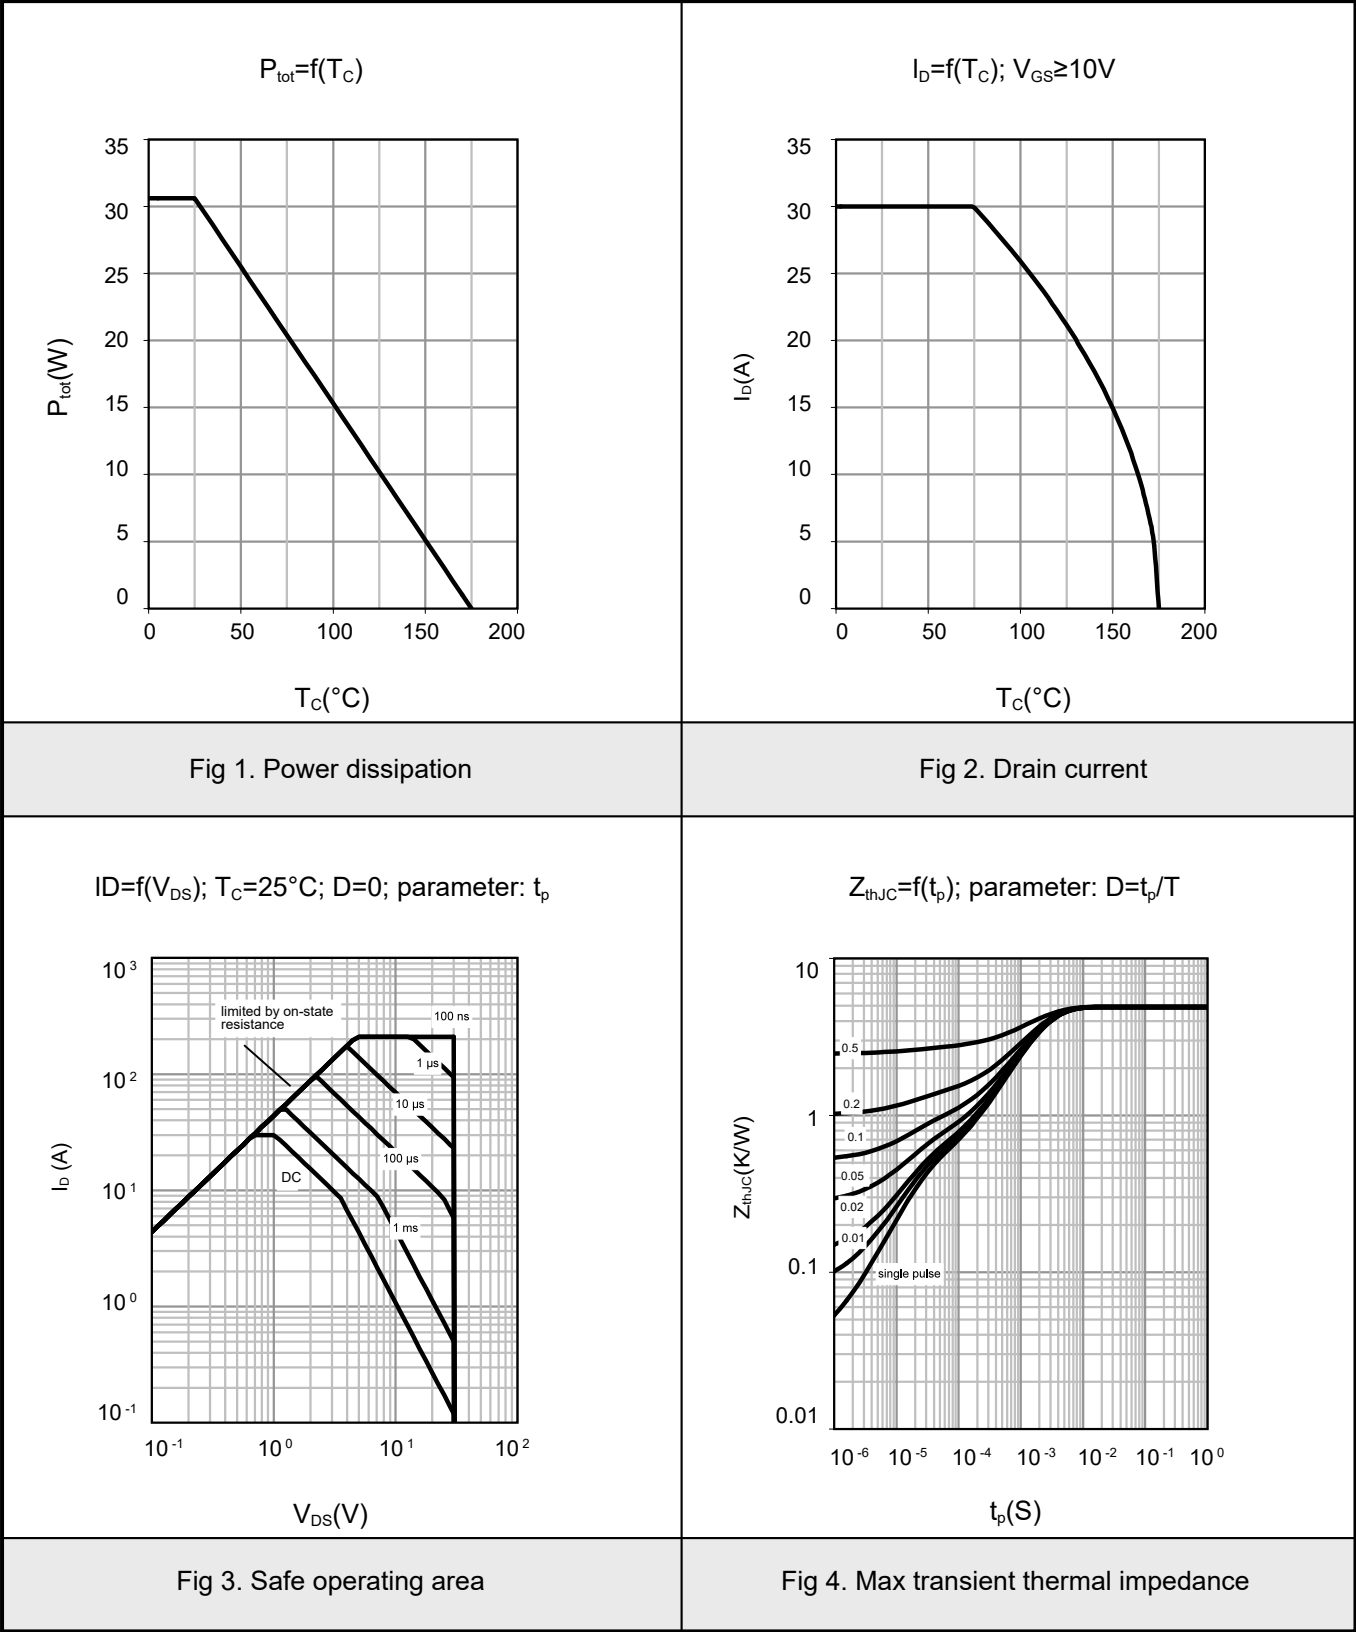




5.2Typical characteristic

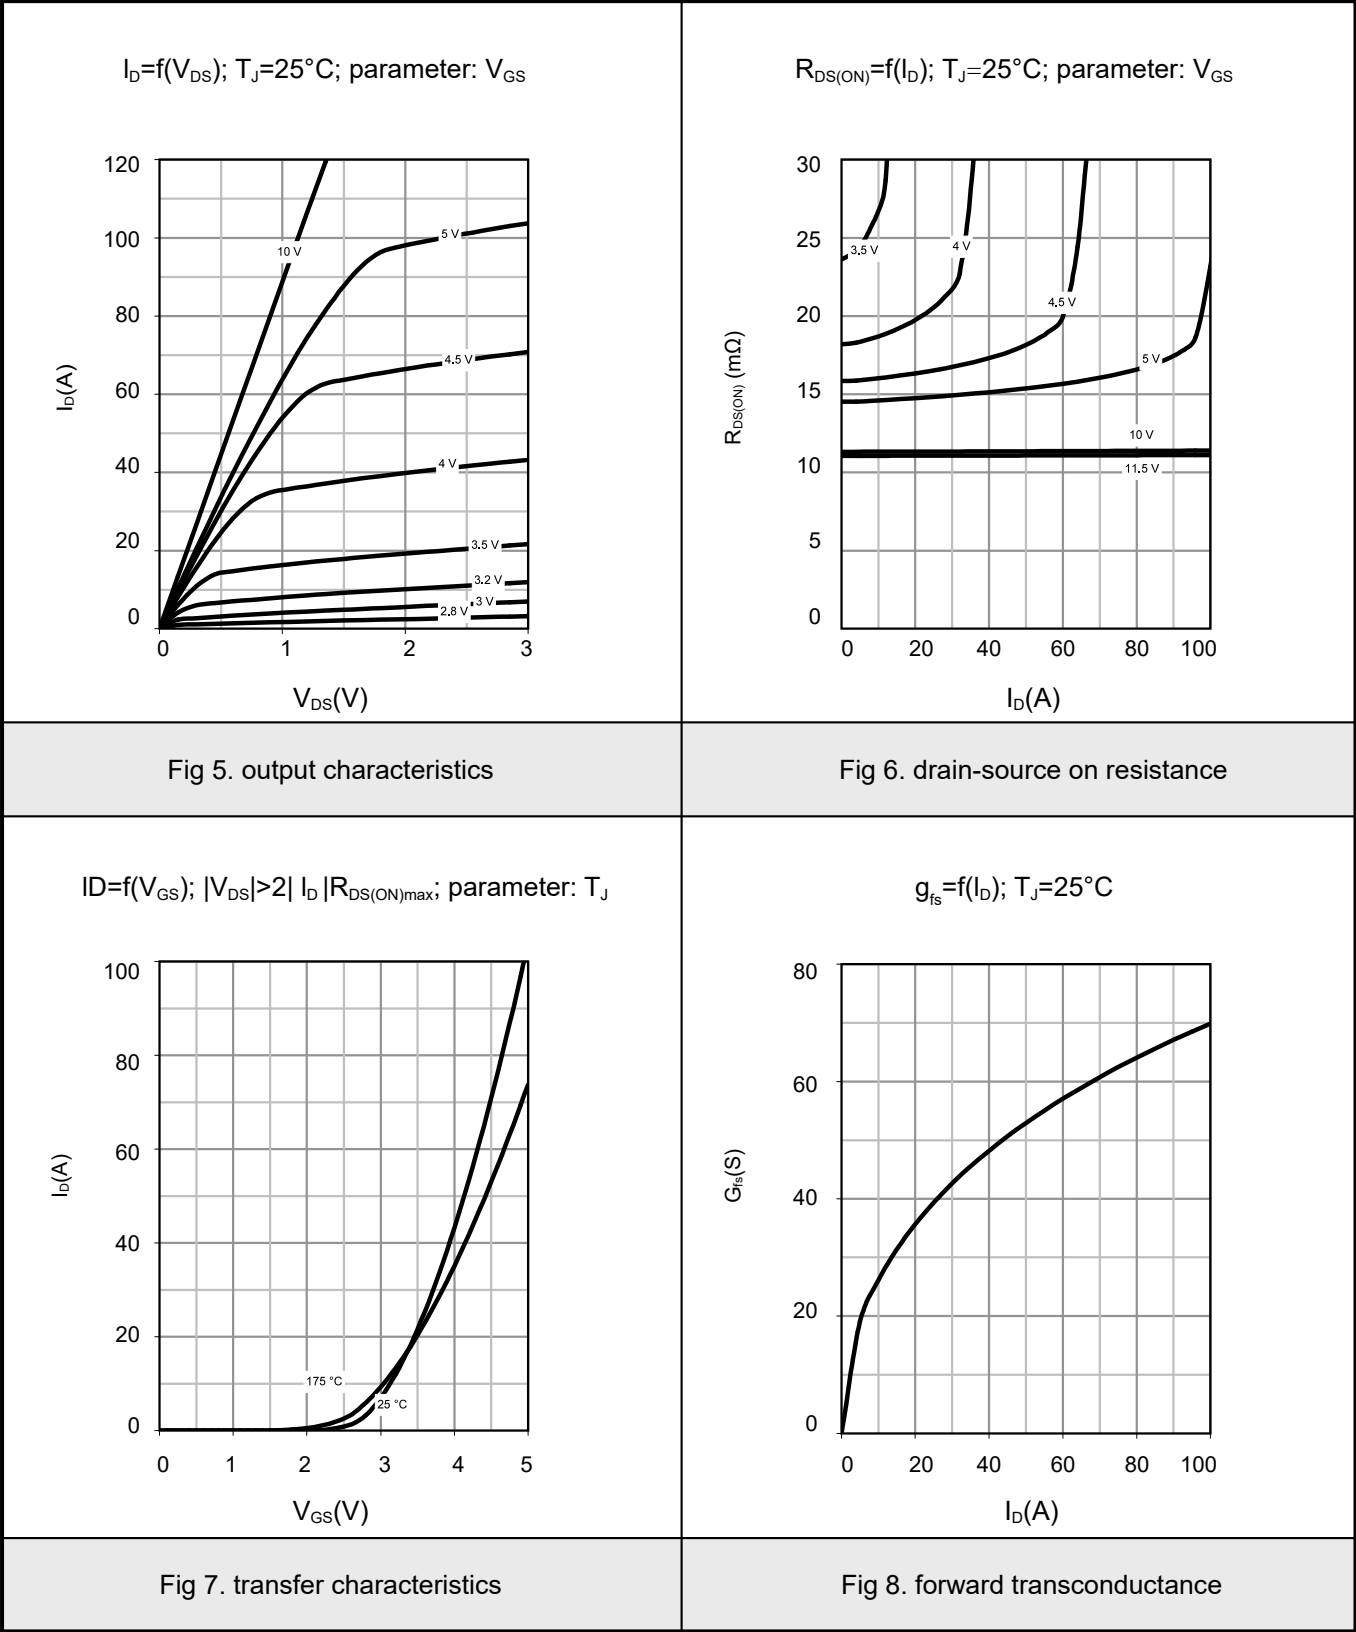




5.3Typical characteristic

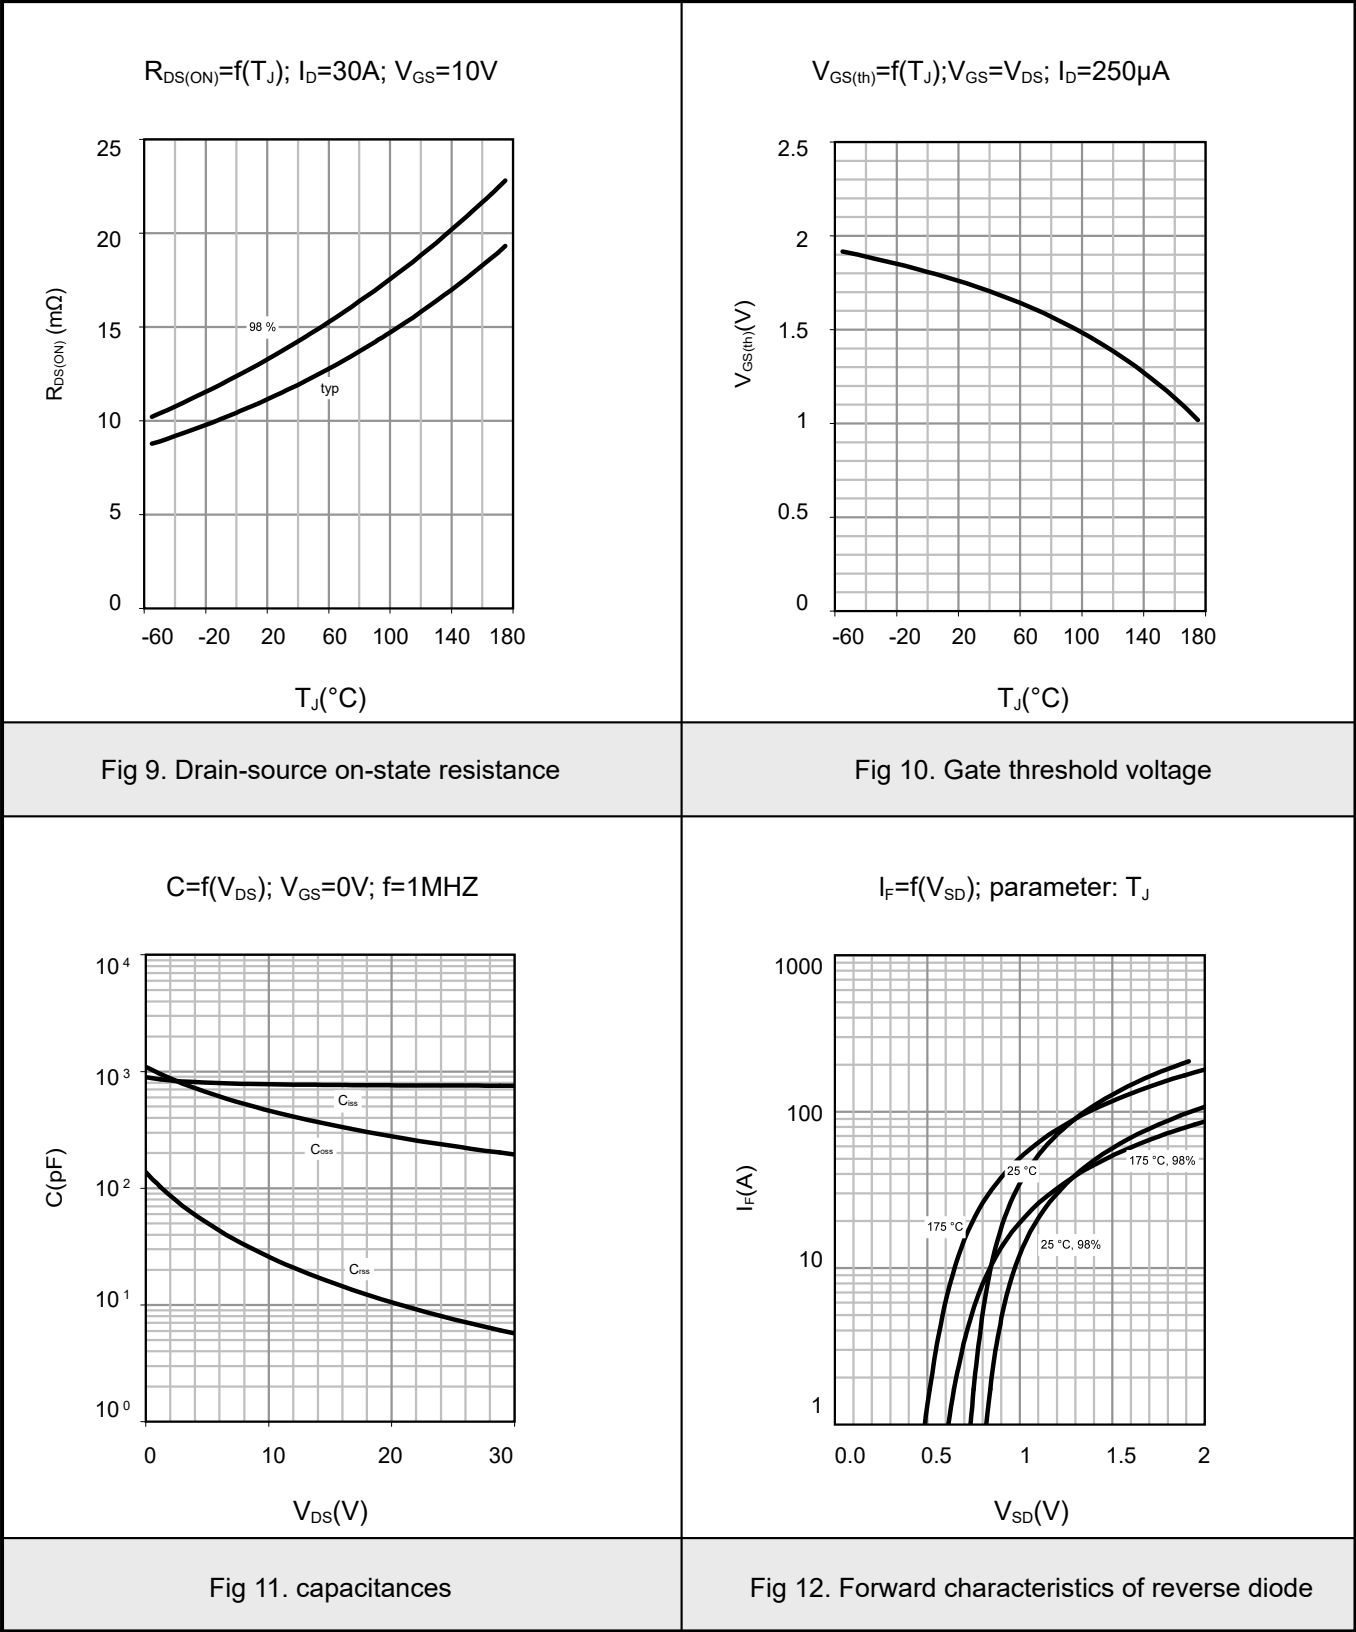




5.4Typical characteristic

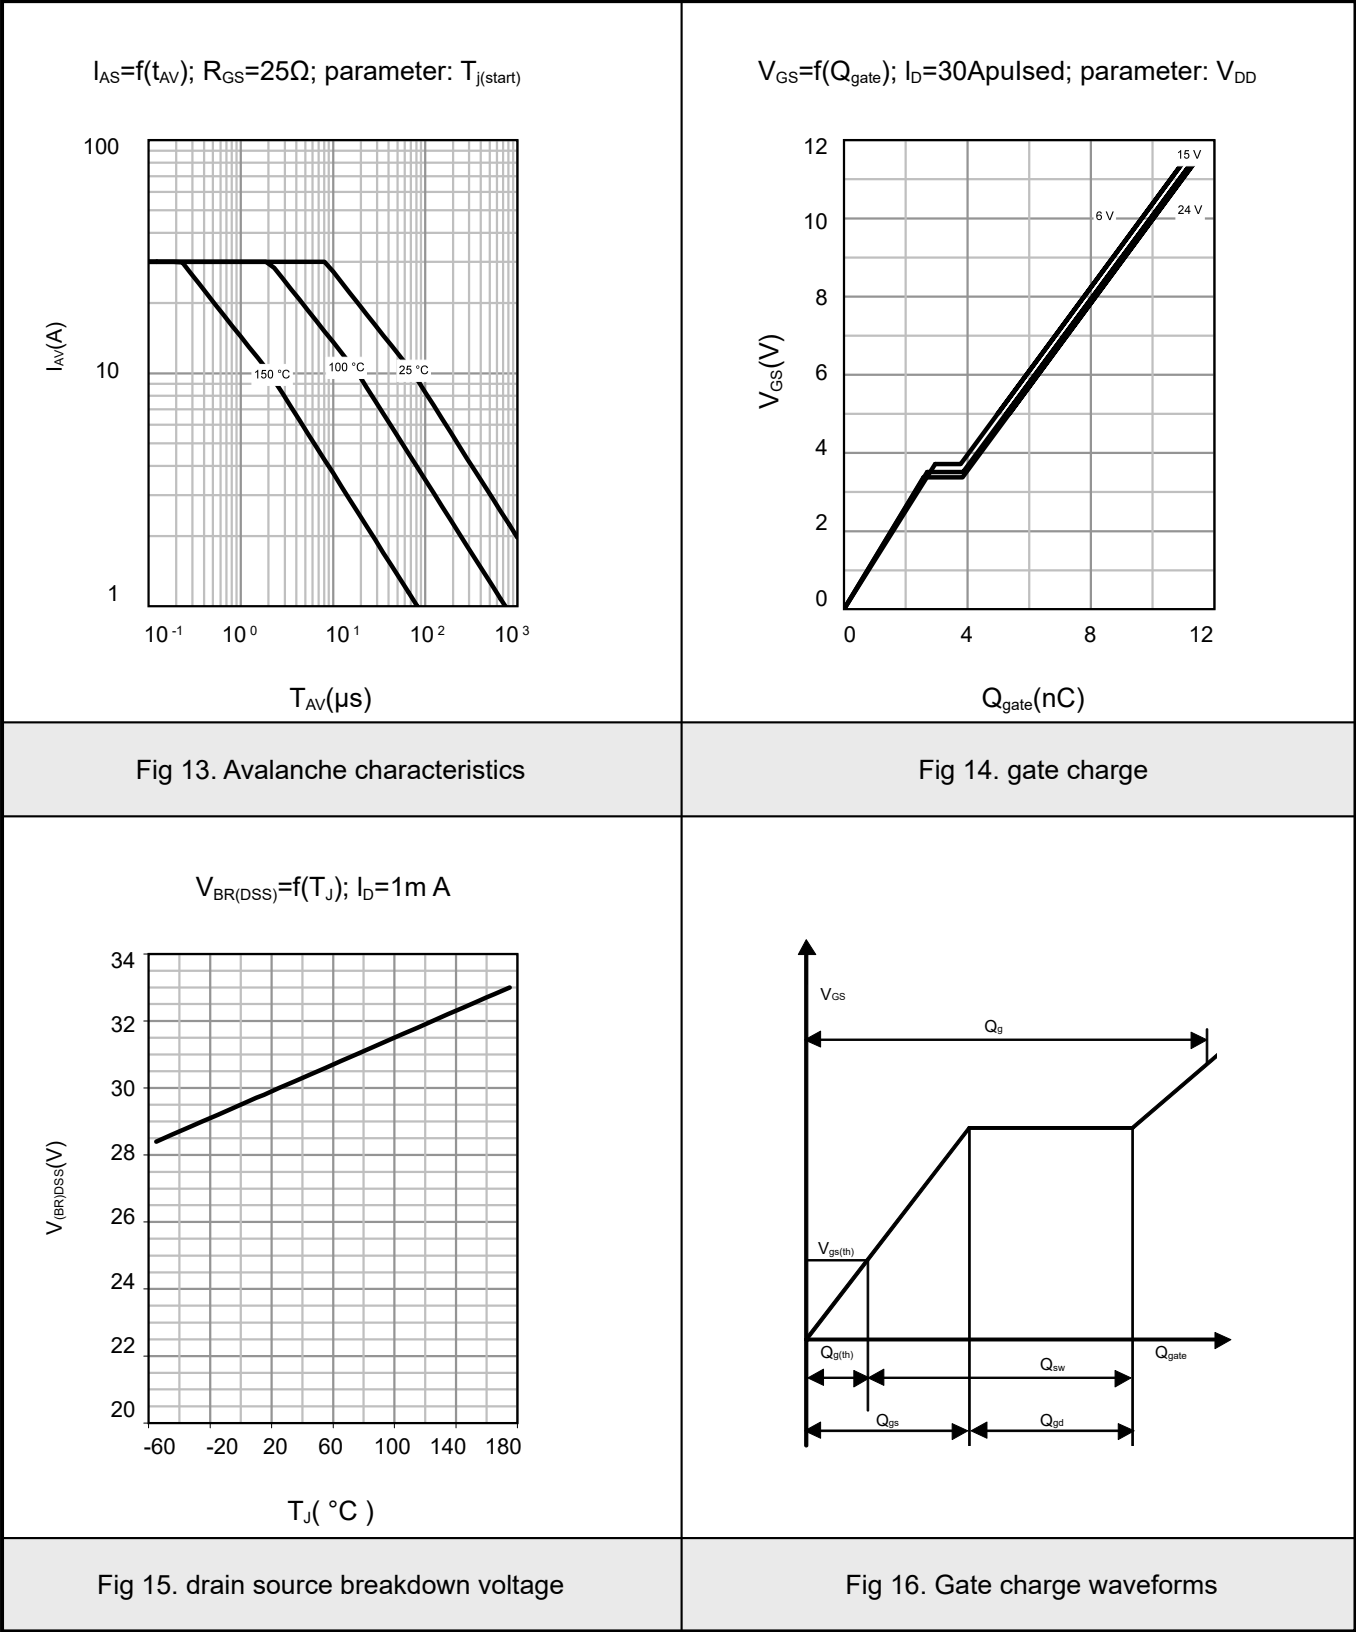



6.TO-252 Package Outline Dimensions

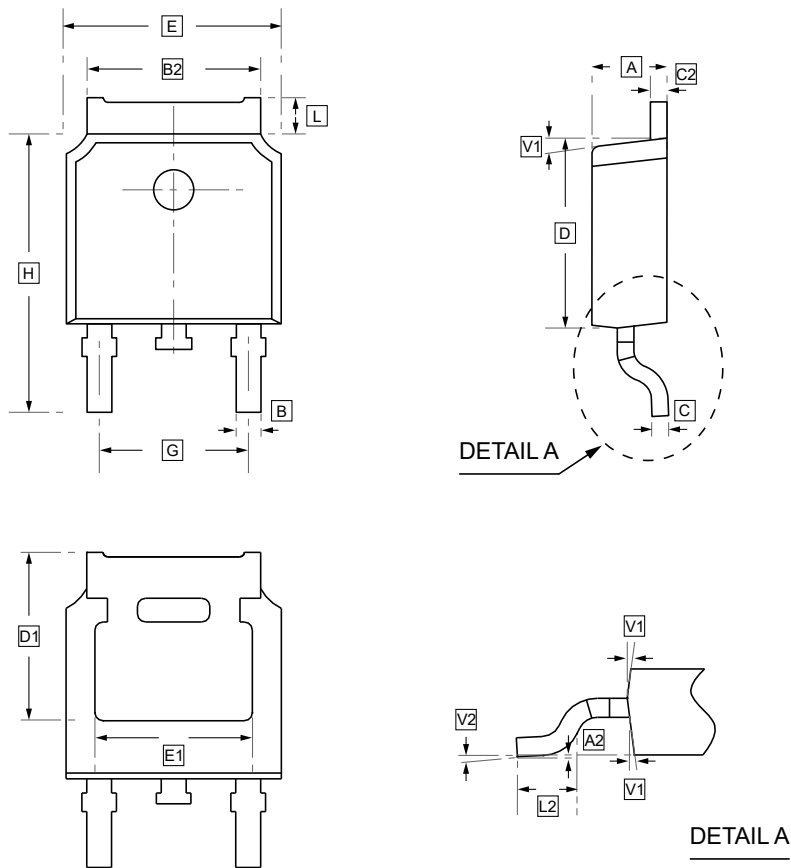


DIMENSIONS (mm are the original dimensions)

Symbol	A	A2	B	B2	C	C2	D	D1	E	E1	G	H	L	L2	V1	V2
Min	2.10	0	0.66	5.18	0.40	0.44	5.90	5.30	6.40	4.63	4.47	9.50	1.09	1.35		0°
Max	2.50	0.10	0.86	5.48	0.60	0.58	6.30	REF	6.80		4.67	10.70	1.21	1.65		6°



7.Ordering information



yy: Year Code
ww: Week Code

Order Code	Package	Base QTY	Delivery Mode
UMW IPD135N03LG	TO-252	2500	Tape and reel



8.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.