

■ DIN rail Attachment Plate(PB • PD Series)

APPLICABLE TO MODEL

DIN rail width : 35mm

Plate model	Model	screws for installation	
		Type	Qty
FD-PBA10	PBA10F	M3	2pcs
FD-PBA15	PBA15F, PBW15F, PDA15F		
FD-PBA30	PBA30F, PBW30F, PDA30F, PDW30F		
FD-PBA50	PBA50F, PBW50F, PBA75F, PDA50F, PDW50F		
FD-PBA100	PBA100F, PDA100F	M3	3pcs
	PBA150F, PDA150F	M3	2pcs
FD-PBA300	PBA300F, PDA300F	M4	2pcs

FD-PBA10, FD-PBA15, FD-PBA30 EXTERNAL VIEW

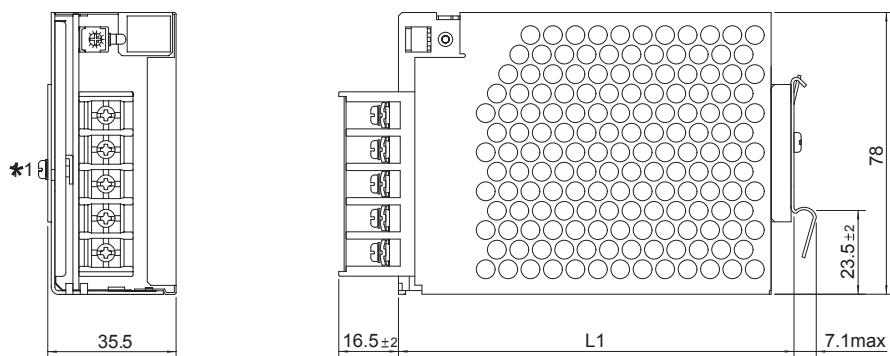


Plate model	Model	L1
FD-PBA10	PBA10F	75.0±2
FD-PBA15	PBA15F, PBW15F, PDA15F	92.0±2
FD-PBA30	PBA30F, PBW30F, PDA30F	110.0±2

- * Material : SECC
- * Thickness : 1.0
- * Tolerance : ±1
- * 1 Screws for installation (attached to Plate)
- * Weight : FD-PBA10 45g max
FD-PBA15 55g max
FD-PBA30 60g max

FD-PBA50, FD-PBA100 EXTERNAL VIEW

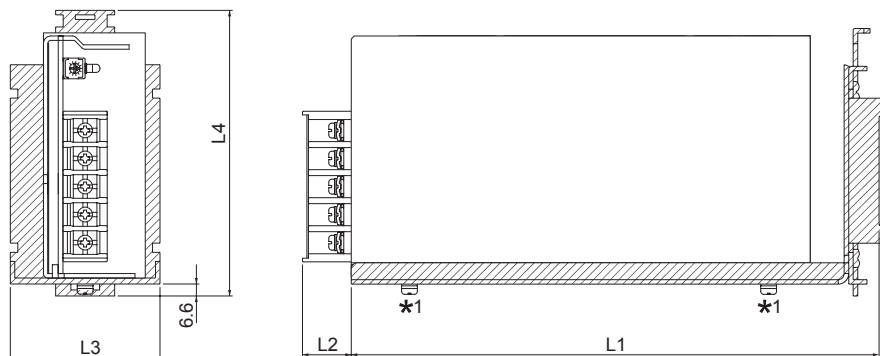


Plate model	Model	L1	L2	L3	L4	★ Material : SECC ★ Thickness : 1.6 ★ Tolerance : ±1 ★ 1 Screws for installation (attached to Plate) ★ Weight : FD-PBA50 220g max Weight : FD-PBA100 260g max
FD-PBA50	PBA50F,PDA50F	135	16.5±2	41	102.5	
	PBA75F	150				
FD-PBA100	PBA100F,PDA100F	162	13.5±2	42.5	112	
	PBA150F,PDA150F	183				

FD-PBA300 EXTERNAL VIEW

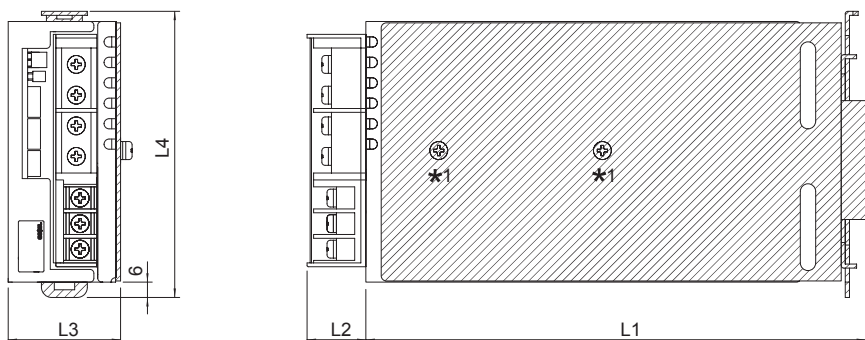


Plate model	Model	L1	L2	L3	L4	* Material : SPHC * Thickness : 2.0 * Tolerance : ± 1 * 1 Screws for installation (attached to Plate) * Weight : 500g max
FD-PBA300	PBA300F,PDA300F	195.5	25max	44	112	

■ DIN rail Attachment Plate(PLA Series)

APPLICABLE TO MODEL

DIN rail width : 35mm

Plate model	Model	screws for installation	
		Type	Qty
FD-PLA15	PLA15F	M3	2pcs
FD-PLA30	PLA30F		
FD-PLA50	PLA50F		

FD-PLA15, FD-PLA30, FD-PLA50 EXTERNAL VIEW

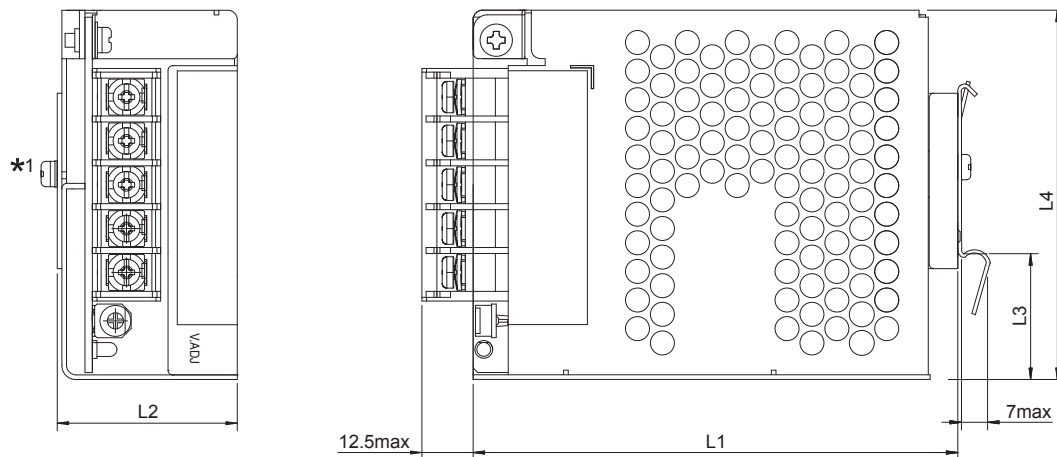


Plate model	Model	L1	L2	L3	L4
FD-PLA15	PLA15F	79±2	39	27.2±2	80
FD-PLA30	PLA30F	94±2	39	27.2±2	80
FD-PLA50	PLA50F	105±2	39	27.2±2	80

- ★ Material : SECC
- ★ Thickness FD-PLA15 : 1.0
FD-PLA30 : 1.0
FD-PLA50 : 1.0
- ★ Tolerance : ±1
- ★ 1 Screws for installation (attached to Plate)
- ★ Weight : FD-PLA15 55g max
FD-PLA30 60g max
FD-PLA50 60g max

DIN rail Attachment Plate(PLA · PJA Series)

APPLICABLE TO MODEL

DIN rail width : 35mm

Plate model	Model	screws for installation	
		Type	Qty
FD-PLA15-2	PLA15F, PJA15F	M3	2pcs
FD-PLA30-2	PLA30F, PJA30F		
FD-PLA50-2	PLA50F, PJA50F		
FD-PJA100-2	PJA100F		
FD-PJA150-2	PJA150F		

FD-PLA15-2, FD-PLA30-2, FD-PLA50-2 FD-PJA100-2, FD-PJA150-2 EXTERNAL VIEW

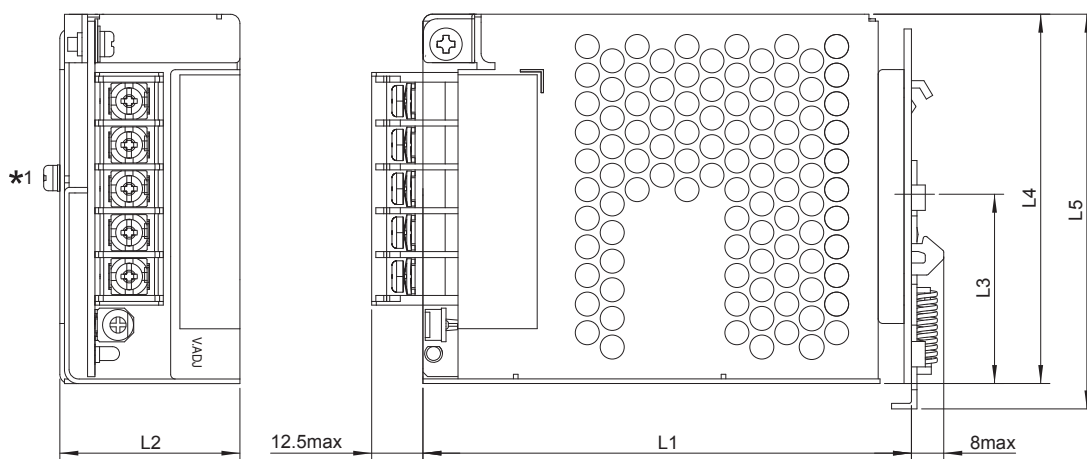


Plate model	Model	L1	L2	L3	L4	L5
FD-PLA15-2	PLA15F, PJA15F	80±2	39	46.5	80	85.5
FD-PLA30-2	PLA30F, PJA30F	95±2	39	46.5	80	85.5
FD-PLA50-2	PLA50F, PJA50F	106±2	39	46.5	80	85.5
FD-PJA100-2	PJA100F	113.5±2	42.6	57	97	102
FD-PJA150-2	PJA150F	133.5±2	42.6	57	97	102

* Material : SPCC (surface finishing : nickel plating)

* Thickness FD-PLA15-2 : 1.0t
FD-PLA30-2 : 1.0t
FD-PLA50-2 : 1.0t
FD-PJA100-2 : 1.6
FD-PJA150-2 : 1.6

* Tolerance : ±1

* 1 Screws for installation (attached to Plate)

* Weight : FD-PLA15-2 95g max
FD-PLA30-2 105g max
FD-PLA50-2 110g max
FD-PJA100-2 170g max
FD-PJA150-2 180g max